
# STANDARD 16 KEYPAD

APEM

## 4+4 MATRIX KEYPAD WITH INSERT POCKETS

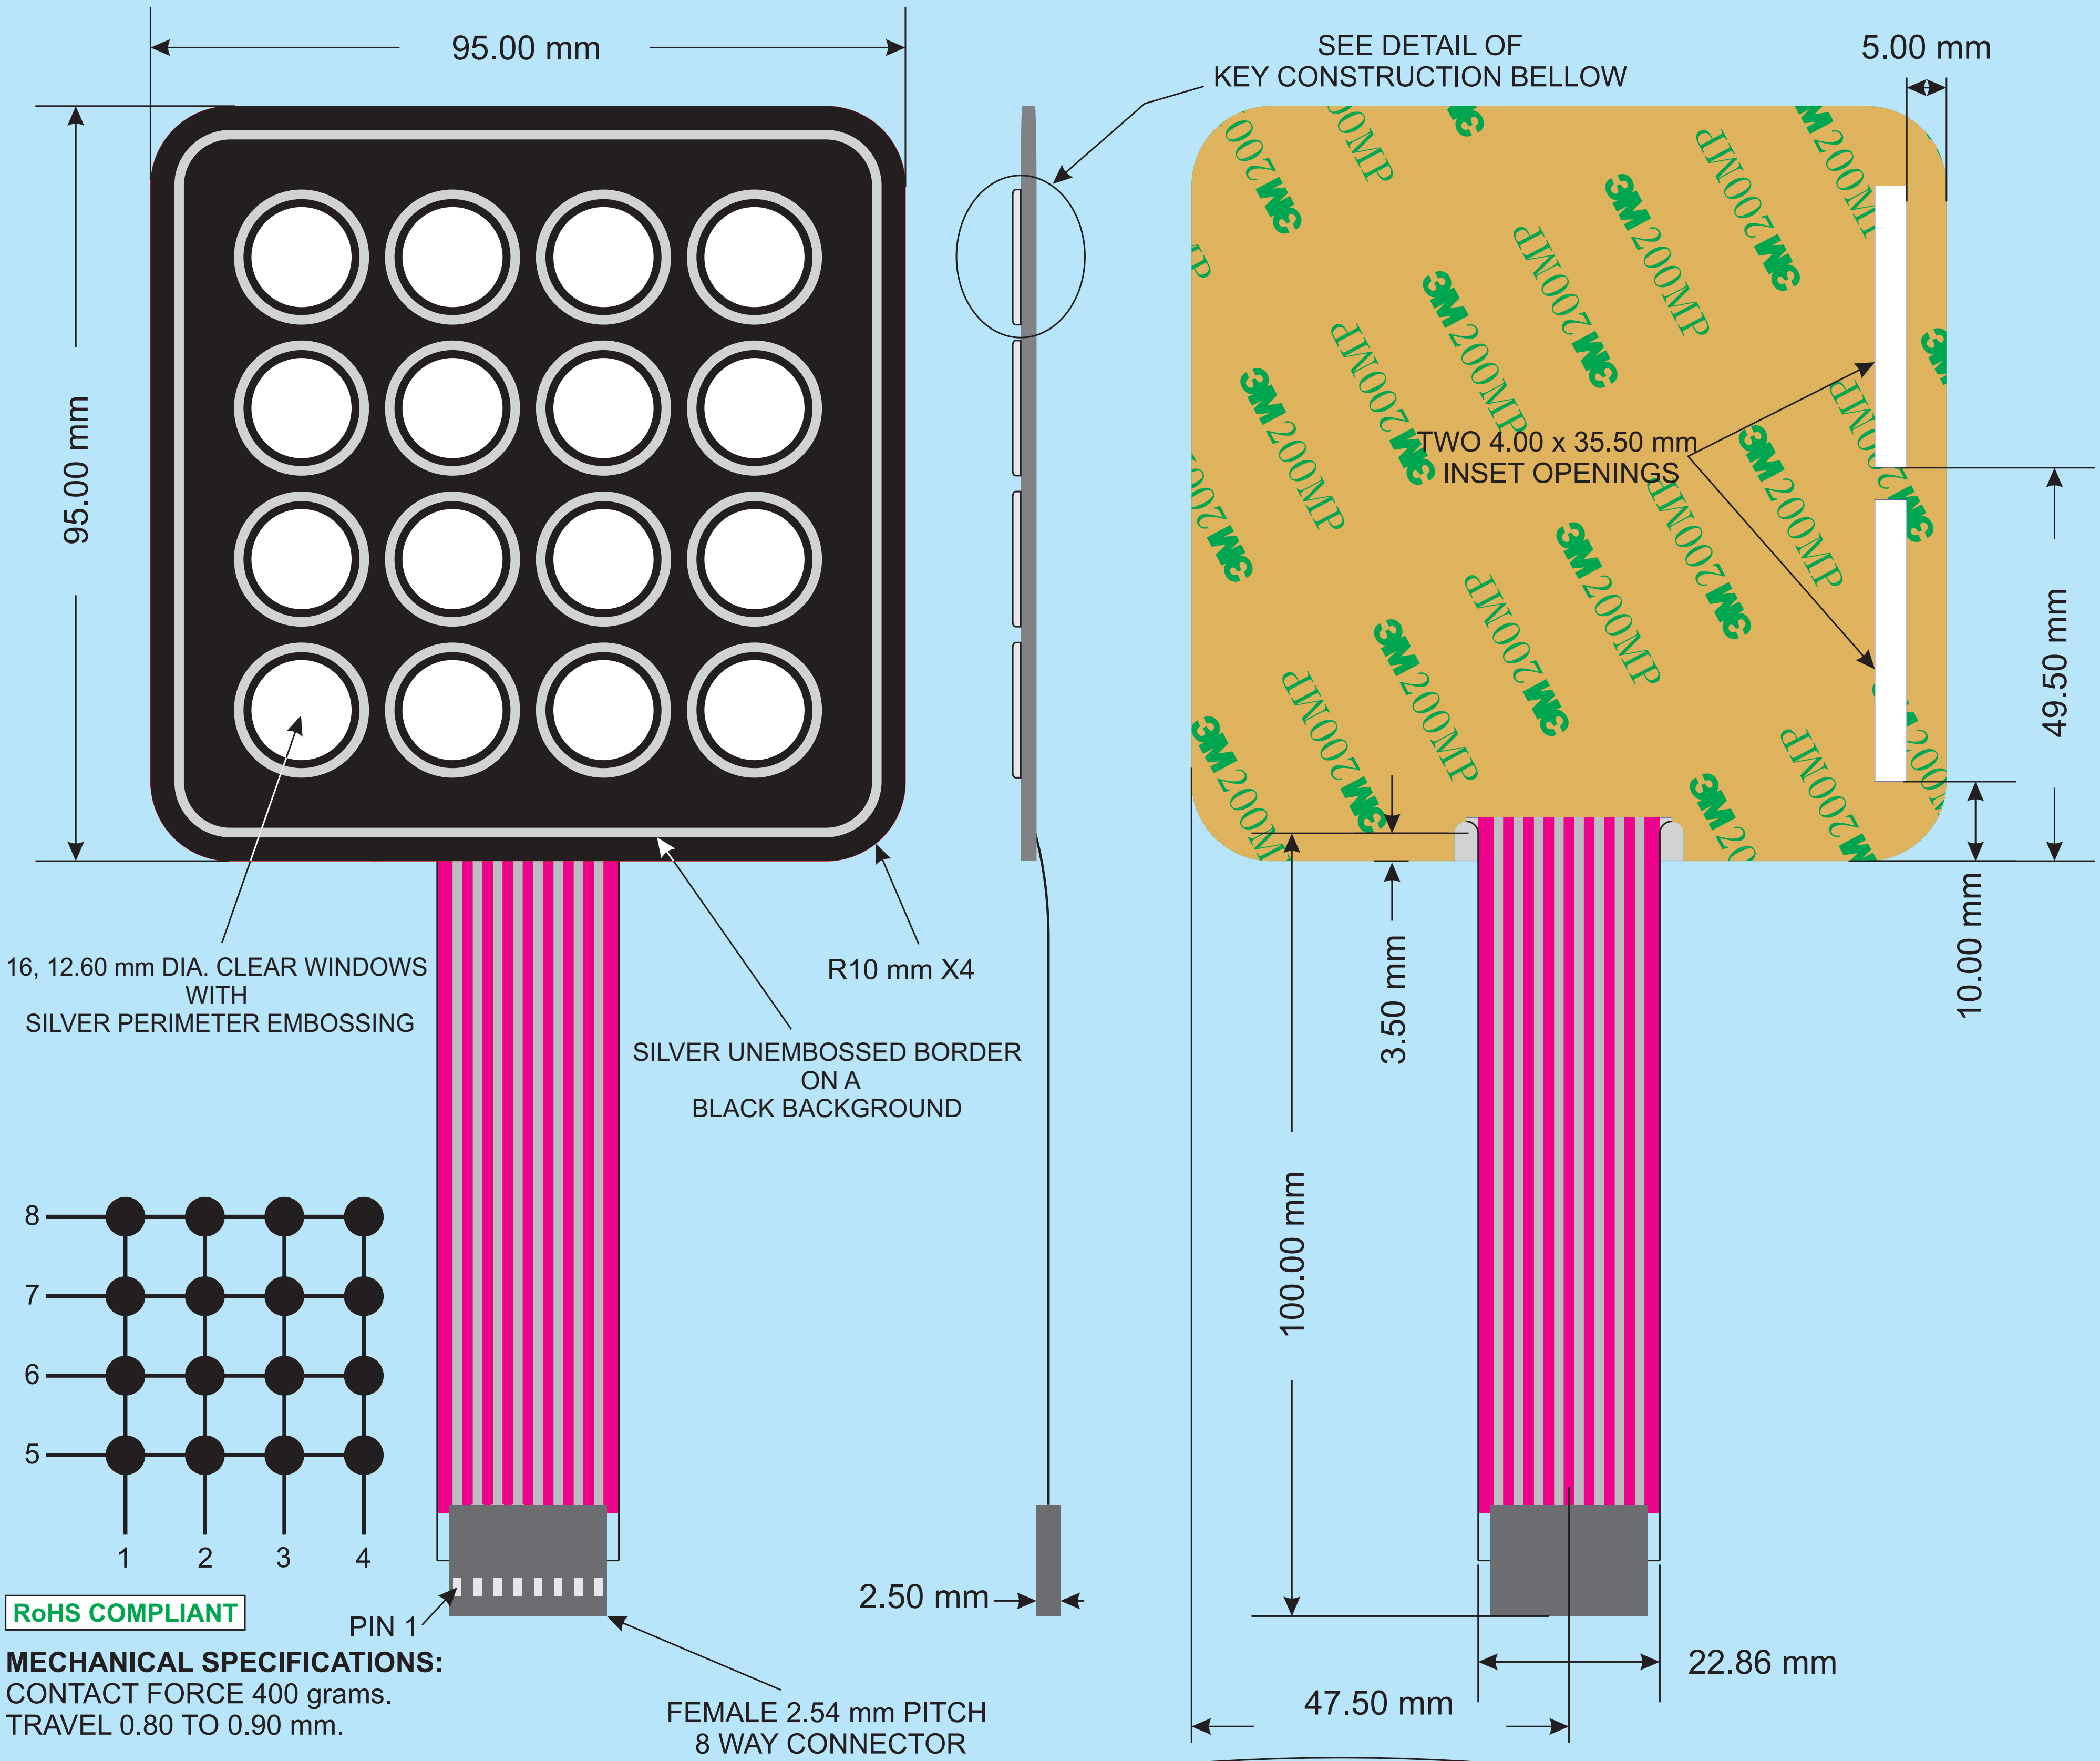



RoHS COMPLIANT


**MECHANICAL SPECIFICATIONS:**
CONTACT FORCE 400 grams.
TRAVEL 0.80 TO 0.90 mm.

**ELECTRICAL SPECIFICATIONS:**
CONTACT VOLTAGE RATING 30V (dc).
CONTACT CURRENT RATING 100mA.
INSULATION RESISTANCE AT 100 V >100 Mohms.
DIELECTRIC STRENGTH 250 V rms.
CAPACITANCE 10 pF typ.
CONTACT BOUNCE BELOW 10 msec. typ.

**ENVIRONMENTAL SPECIFICATIONS:**
OPERATING TEMPERATURE -30 TO +55 C.
STORAGE TEMPERATURE -40 TO +60 C.

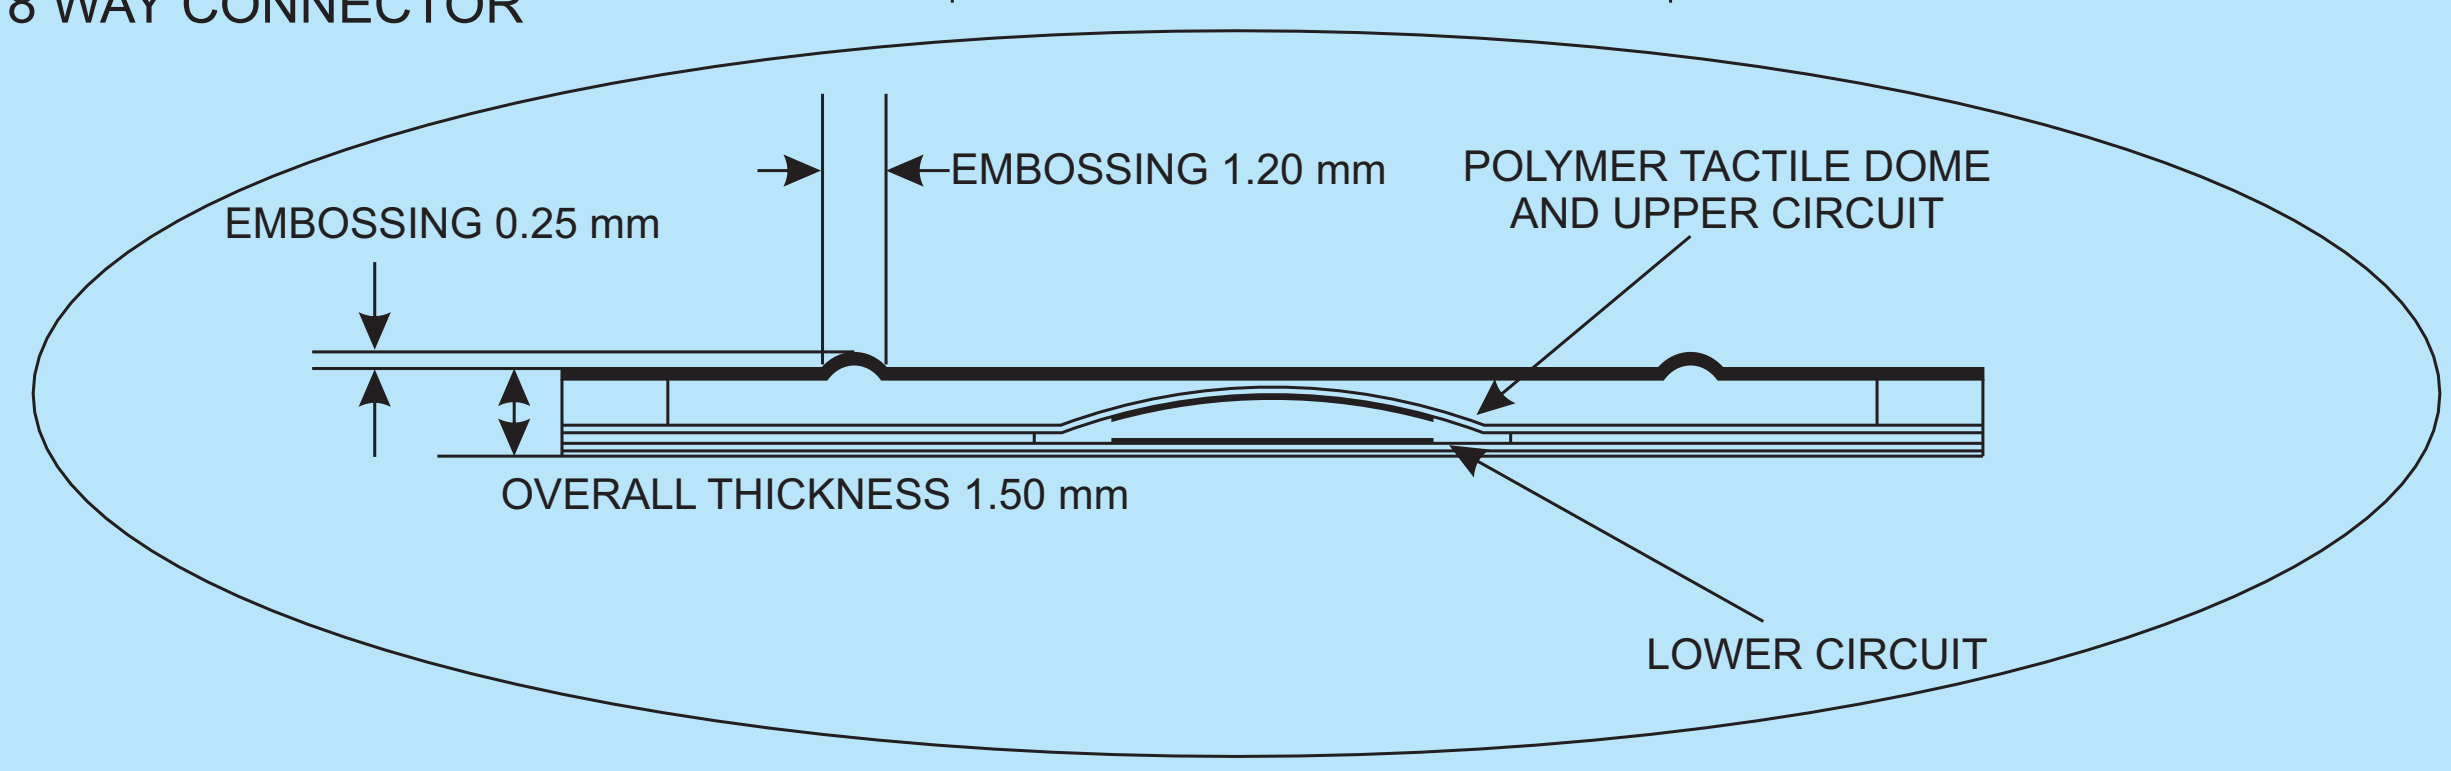


**4 INSERTS WITH BLACK GRAPHICS ON A SILVER BACKGROUND**
**SUPPLIED WITH THIS KEYPAD. FOR OTHER VARIANTS OF INSERTS PLEASE CALL APEM**

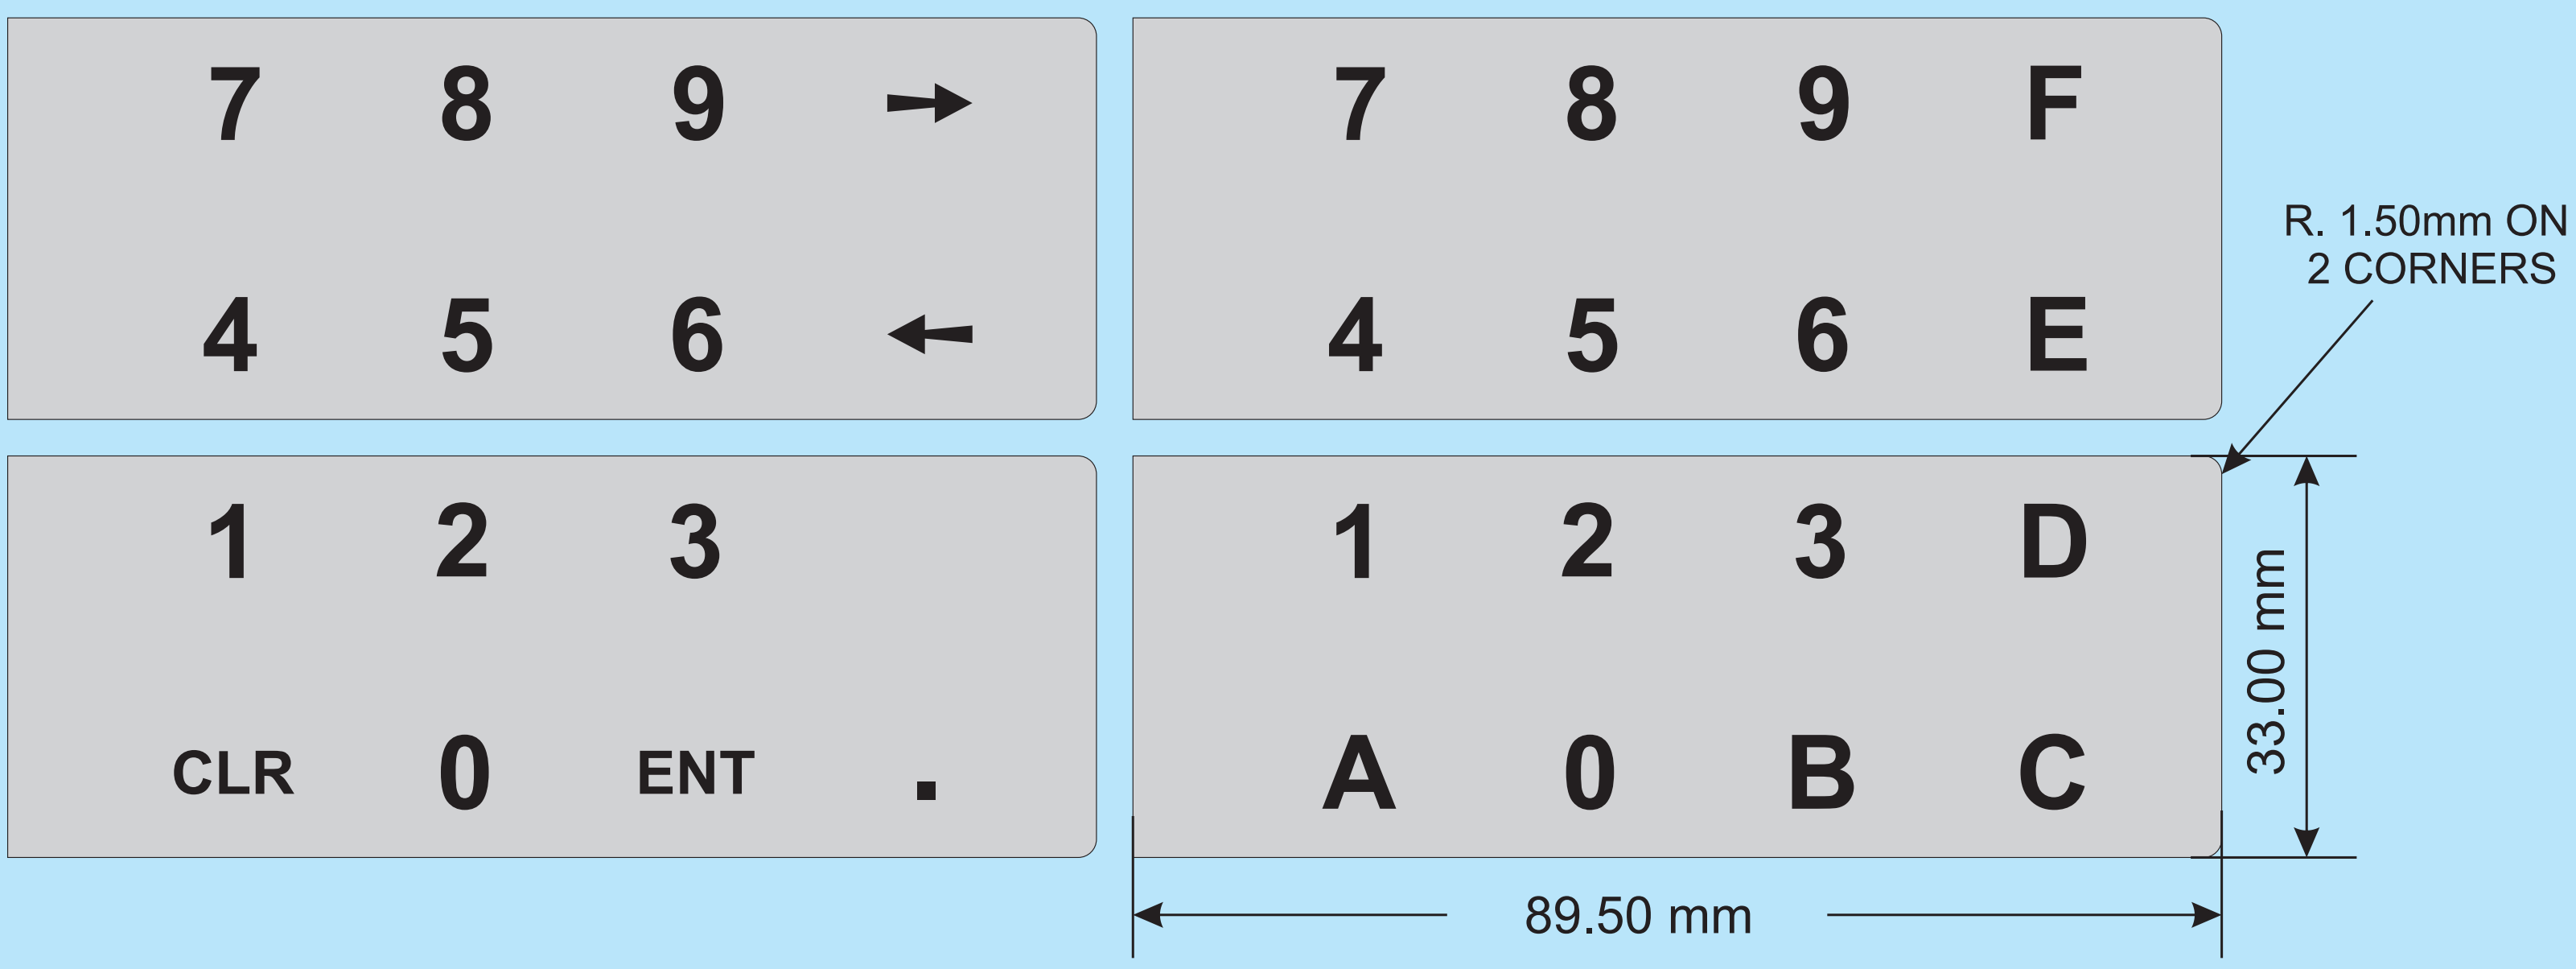


**Telephone: (44) 01844 202400 Fax: (44) 01844 202500 email: sales@apem.co.uk www.apem.co.uk**

3441-020-0D